


Model: AF16-Q1H

Application

K-TOP Flange Adaptor is suitable for joining 2 pipes/ fittings with spigot end and flanged end together especially in repair situations. It is particularly installed at the downstream of water meter so as to facilitate installation and maintenance of the water meter and the associated pipework.

Technical Specification

Nominal Size: DN80 ~ DN600
 Max. Working Pressure: PN16
 Coating: Fusion Bonded Epoxy (min. 250µm)
 Flange Connection: BS EN 1092-2

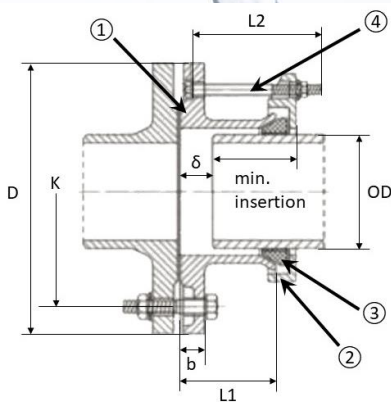

#	Description	Material
1	Body	Ductile Iron
2	Gland	Ductile Iron
3	Gasket	EPDM
4	Fixing	Carbon Steel / Stainless Steel

Dimensions (DN80 – 600)

Size	OD	Outside diameter of flange D	Diameter of bolt circle K	Bolt hole	Flange Thickness b	L1	min insertion	δ	Fixing Bolt L2
DN 80	88-103	200	160	8 x Ø19	19	76	50	40	4 x M12 x 120
DN 100	108-128	220	180	8 x Ø19	19	79	50	40	4 x M12 x 120
DN 150	158-181	285	240	8 x Ø23	19	80	50	40	4 x M12 x 130
DN 200	218-235	340	295	12 x Ø23	20	84	50	40	4 x M12 x 130
DN 250	272-289	400	355	12 x Ø28	22	91	50	40	6 x M12 x 140
DN 300	315-332	455	410	12 x Ø28	24.5	91	50	40	6 x M12 x 140
DN 350	374-391	520	470	16 x Ø28	26.5	115	80	60	8 x M16 x 180
DN 400	400-429	580	525	16 x Ø31	28	120	80	60	8 x M16 x 180
DN 450	476-493	640	585	20 x Ø31	30	120	80	60	10 x M16 x 180
DN 500	500-532	715	650	20 x Ø34	31.5	120	90	60	10 x M16 x 180
DN 600	630-647	840	770	20 x Ø37	36	130	90	70	10 x M16 x 180

For larger DN, please contact with us

K **KEMBLA (HK) LIMITED**
 金特霸(香港)有限公司
 Member of Metal Manufactures Group

香港 灣仔 謝菲道90號 豫港大廈5樓
 5/F Henan Building, 90 Jaffe Road, Wanchai, Hong Kong
 Tel: +852 2528 0999 Fax: +852 2528 3113 Email: info@kembla.com.hk Website: www.kembla.com.hk