


# FLANGE TYPE FLEXIBLE HOSE TYPE: F122-4-1-PN16-0

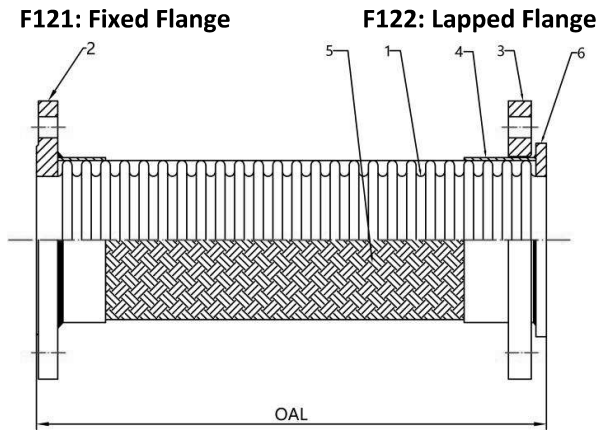

NO.	Parts	Material
1	Flexible Tube	SUS304
2	Fixed Flange	Carbon Steel
3	Swivel Flange	Carbon Steel
4	Collar	SUS304
5	Wire Braid (Double Layers)	SUS304
6	Lap Joint	SUS304

Max Working Temperature: 250°C

Max Working Pressure :16 bars

## Specification

Item	Size	OAL (mm)	Max static Lateral Movement (mm)
F122-4-1-PN16-0	DN25	300	20
F122-4-1-PN16-0	DN32	300	13
F122-4-1-PN16-0	DN40	300	10
F122-4-1-PN16-0	DN50	300	7
F122-4-1-PN16-0	DN65	300	6
F122-4-1-PN16-0	DN80	300	4
F122-4-1-PN16-0	DN100	300	3
F122-4-1-PN16-0	DN125	300	3
F122-4-1-PN16-0	DN150	300	2
F122-4-1-PN16-0	DN200	300	2
F122-4-1-PN16-0	DN250	300	2
F122-4-1-PN16-0	DN300	300	2

Applicable Fluid: Oil, Water, Hot Water, Steam, Gas, Air

Limited Working Pressure: Limited of Flange and Hose Rating

Standard Test Pressure: 1.5Times of Flange and Hose Rating

Bursting Pressure: 4 Times of Working Pressure