

Fig.160W Single Non-Return Valve

FEATURES & BENEFITS

- Spring loaded axially guided disc
- Positive non-slam shut-off
- WRAS approved for use with wholesome (potable) water to 85°C
- Resilient seat
- WRAS Approved fusion bonded epoxy internal and external coating



Fig.160W

MATERIAL SPECIFICATION

Component	Material	Specification	
		BS EN	ASTM
Body	Cast Iron	1561 EN-GJL-250	A126 CLASS B
Disc	Fusion Bonded Epoxy Cast Iron	1561 EN-GJL-250	A126 CLASS B
Seat	EPDM	-	-
Spring	Stainless Steel 304	1.4301	AISI 304
Stem	Stainless Steel 304	1.4301	AISI 304
Bushing	Brass	12164 CW617N	-
Guide	Cast Iron	1561 EN-GJL-250	A126 CLASS B

PRESSURE/ TEMPERATURE RATING

16 bar
-10 to 110°C (WRAS to 85°C)


SPECIFICATION

Flanged to BS EN 1092-2 PN16

DIMENSIONS & WEIGHTS

Size (DN)		50	65	80	100	125	150	200	250	300
A	mm	100	120	140	170	200	230	288	354	410
B	mm	165	185	200	220	250	285	340	405	460
Weight	kg	8	10	13	17	28	38	52	85	125

DIMENSIONAL DRAWINGS

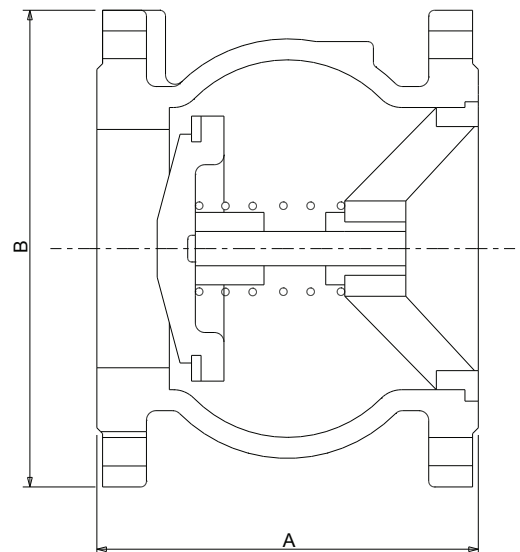

Note: These valves are not intended to be used as backflow prevention devices conforming to Schedule 2 Section 6 of the WRAS Water Regulations Guide.

Every effort has been made to ensure that the information contained in this publication is accurate at the time of publishing. Hattersley Ltd assumes no responsibility or liability for typographical errors or omissions or for any misinterpretation of the information within the publication and reserves the right to change without notice.