

# Fig.816HK Strainers

## FEATURES & BENEFITS

- Helps to protect the system by trapping foreign matter
- Streamlined flow contours minimise pressure drop
- Stainless steel 316 screen provides excellent corrosion resistance
- Asbestos-free non-stick gasket
- Drain plug in cap as standard



## MATERIAL SPECIFICATION

Component	Material	Specification
Body	Cast Iron	BS EN 1561 EN-GJL-250
Cap	Cast Iron	BS EN 1561 EN-GJL-250
Gasket	Asbestos Free	-
Stud	Steel	BS 4439 GRADE 8.8
Nut	Steel	BS 4439 GRADE 8.8
Screen	Hole Size Ø1.5mm	Stainless Steel 316
	32% Open Ratio	
Drain Plug	Malleable Iron	-
Test Point Plug Rc 1/4	Malleable Iron	-

## PRESSURE/ TEMPERATURE RATING

PN16  
-10 to 120°C

## END CONNECTION

Flanged to BS EN 1092-2 PN16

## SPECIFICATION

End flanges conform to BS EN 1092-2 PN16 Section 3.2 table 11 with raised face and are normally supplied drilled. Strainers are normally supplied with a stainless steel perforated strainer element having 1.5mm diameter holes. This product is not suitable for use on group 2 liquids only, as defined by the Pressure Equipment Directive 2014/68/EU. Bosses drilled, tapped and plugged.


## SCREEN DATA

Nom size	mm	65	80	100	125	150
Hole Dia	mm	1.5	1.5	1.5	1.5	1.5
Free Flow Area	%	32	32	32	32	32
Screen Flow Area to Pipe Bore Area	%	381	287	272	268	245

## DIMENSIONS & WEIGHTS

Size (DN)		65	80	100	125	150
A	mm	185	200	220	250	300
B	mm	20	22	24	26	28
C	mm	122	138	158	188	212
D	mm	3	3	3	3	3
E	mm	290	310	350	400	480
F	mm	210	215	245	297	333
G	mm	298	301	350	430	484
H	Rc	1 1/4"	1 1/4"	1 1/4"	1 1/2"	1 1/2"
Weight	kg	23	30	43	71	93

## DIMENSIONAL DRAWING

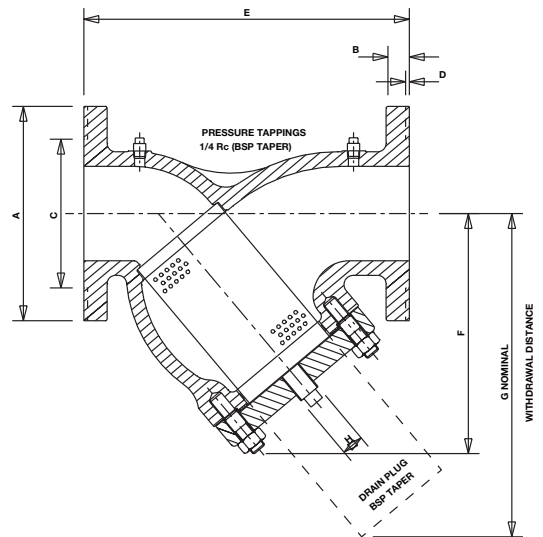

61#001- Every effort has been made to ensure that the information contained in this publication is accurate at the time of publishing. Hattersley Ltd assumes no responsibility or liability for typographical errors or omissions or for any misinterpretation of the information within the publication and reserves the right to change without notice.