WC WC CONNECTORS

FLEXIBILITY YOU CAN TRUST

At Multikwik we take great pride in plumbing and offer innovative products that are capable of giving you that little bit of extra help.

Thanks to the flexible EVA and reliable TPE seals, the Multikwik WC connectors allow for imperfect pipes and spigots, while still ensuring a watertight joint past the point of installation – ideal for tolerating movement and WC load bearing pressures. The seals and multidepth finns give additional peace of mind for a secure seal.

Multikwik were pioneers 50 years ago, with the introduction of a flexible WC connector and we're proud to say that we are still the name asked for by plumbers. Trust Multikwik to be your first choice for WC connectors.

WC Connectors

Dur comprehensive range is one of the largest on the market, and covers spigots of 74mm -I 14mm, ensuring an accurate fit, regardless of the make and model of sanitary chinaware.

Selecting the right WC connector

Measure the OUTER diameter of your spigot.



Measure the INNER diameter of your pipe.



Then take a look at the dimensions provided for the individual connectors to find the best matches.

Know your WC pan spigot

KEY	SIZE	PIPE SUITABILITY	BRITISH STANDARD
PAGE: 62-73	97-108 mm	Modern & New Pans	BS 5503 & BS 5504
PAGE: 73-75	108-114 mm	Old & Syphonic Pans	BS 1213
PAGE: 76-77	76-95 mm	Stainless Steel Pans	_

Know your pipe


KEY	SIZE	PIPE SUITABILITY	BRITISH STANDARD
STANDARD 1	99-105 mm	uPVC / Clay / Cast Iron	BS 4514/BS 4660/ BS 65/BS 416
CAST IRON 2	88-92 mm	Traditional Cast Iron	_
OLD 3	74-77 mm	_	_
COPPER 4	105-108 mm	Copper	_

All WC connectors are made to fit pans conforming to BS 5503 and BS 5504, including ones with bosses.







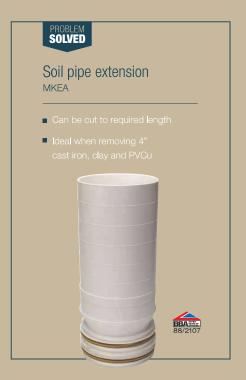









REASONS TO TRUST MULTIKWIK

Sealing flanges



MKS2

WC CONNECTORS / MODERN

EXTENDED STRAIGHT

MKS4

LONG ADJUSTABLE

MKLAS1

STRAIGHT -VENT BOSS

MKSB4

18MM OFFSET

MKO2

PIPE (1): Standard 99-105mm (2): Cast Iron 88-92mm (3): Old 74-77mm (4): Copper 105-108mm:







When connecting a WC connector to the pan spigot, the sealing flanges must be pushed inside with the pipe.

Don't pull the other sealing flange out over the top of the pan spigot - it may lead to leaks.





MKS2

MKS1 vs

It's easy to get it right! When you install a new toilet, in a new build development, you should use a MKS2 WC connector. When you refurbish an old toilet, you need to use a MKS1 WC connector (see page 73).

> Use MKS1 on an installation, where it's been DONE!


> Use MKS2 on an installation, where it's all NEW!

TRUST MULTIKWIK Since its inception Multikwik has revolutionised plumbing in the UK. It was one of the first companies to support the use of plastics in plumbing. The innovative EVA WC connectors first introduced to the UK by Multikwik provided plumbers with a solution to a long standing plumbing problem.













PRODUCT CODE	MKSB4
PAN SPIGOT OUTER DIAMETER (mm)	97 – 108
SOIL PIPE INNER DIAMETER (mm)	99 – 105
WEIGHT (KG)	0.22
DIMENSIONS (mm) AxBxC	42 x 104 x 70

PRODUCT CODE	МКО2
PAN SPIGOT OUTER DIAMETER (mm)	97 – 108
SOIL PIPE INNER DIAMETER (mm)	99 – 105
WEIGHT (KG)	0.17
DIMENSIONS (mm) A x B x C	45 x 70 x 20



- Known as the No.2 the plumbers favourite
- This connector is for new style pans only

PRODUCT CODE	MKS2
PAN SPIGOT OUTER DIAMETER (mm)	97 – 108
SOIL PIPE INNER DIAMETER (mm)	99 – 105
WEIGHT (KG)	0.16
DIMENSIONS (mm) A x B x C	43 x 52 x 15

PRODUCT CODE	MKS4
PAN SPIGOT OUTER DIAMETER (mm)	97 – 108
SOIL PIPE INNER DIAMETER (mm)	99 – 105
WEIGHT (KG)	0.19
DIMENSIONS (mm) AxBxC	43 x 105 x 70

PRODUCT CODE	MKLAS1
PAN SPIGOT OUTER DIAMETER (mm)	97 – 108
SOIL PIPE INNER DIAMETER (mm)	99 – 105
WEIGHT (KG)	0.46
DIMENSIONS	40 x 285 x 255

Hong Kong distributor: Kembla (HK) Limited www.kembla.com.hk



WC CONNECTORS / MODERN

KEY:

Adjustable

PIPE 1: Standard 99-105mm 2: Cast Iron 88-92mm 3: Old 74-77mm 4: Copper 105-108mm:





40MM OFFSET

MULTICLIK — FLEXIBLE STRAIGHT

MULTICLIK 90° BEND

MULTICLIK 90° BEND INCL. BOSS

MKC2BB90

Extends from 405 to 740mm

retains its position

whatever shape

Converts a 'P' trap

adjustment for

final connection

a vertical position

To be installed in

is required

























MKO4

97 - 108


99 - 1050.19 43 x 85 x 43






DOUCT CODE	MKC2	PRODUCT CODE	МКС2В9
I SPIGOT OUTER METER (mm)	97 – 108	PAN SPIGOT OUTER DIAMETER (mm)	97 – 108
L PIPE INNER METER (mm)	99 – 105	SOIL PIPE INNER DIAMETER (mm)	99 – 105
IGHT (KG)	0.37	WEIGHT (KG)	0.57
IENSIONS n) A x B x C	50 x 170 x 120	DIMENSIONS (mm) AxBxC	50 x 270 x 1







REASONS TO TRUST MULTIKWIK
Multiclik connector
Retains its position whatever shape is required.
Extends from 225 to 550mm.
Flexible ends for excellent joint quality.

PRODUCT CODE	МКС2ВВ90
PAN SPIGOT OUTER DIAMETER (mm)	97 – 108
SOIL PIPE INNER DIAMETER (mm)	99 – 105
WEIGHT (KG)	0.59
DIMENSIONS (mm) A x B x C	50 x 265 x 105



AN SPIGOT OUTE DIAMETER (mm)

OIL PIPE INNER IAMETER (mm)



14° BEND

MKB114

WC CONNECTORS / MODERN

PIPE (1): Standard 99-105mm (2): Cast Iron 88-92mm (3): Old 74-77mm (4): Copper 105-108mm:





REASONS TO TRUST MULTIKWIK

Make sure you know your pans and spigots

Pan dimensions

97 - 108mm Modern Pans 108 - 114mm Old Pans 76 - 96mm Stainless Steel

Spigot sizes

- 1 99 105mm Standard
- 2 88 92mm Cast Iron
- **3** 74 77mm Old
- 4 105 108mm Copper



Multilink

Multilink is a unique fitting which sleeves the fins of all 99 - 105mm outlet Multikwik pan connectors.

Enabling direct connection to be made to the inlet of another pan connector.



See page 79 for Multilink.

TRUST MULTIKWIK Don't worry if your pipe or spigot aren't true - Multikwik WC connectors are made from EVA

and are designed to be flexible.

90° BEND

MKB2190



BBA 88/2107

MKBB2190

90° BEND — VENT BOSS







45° BEND


MKB45



104° BEND


MKB21104






- 40mm vent boss
- Must be used in a vertical position if boss is being used.

Tr	_	_	
B			
_			\Rightarrow
T G			畫
0			=



Ideal for corner installations



SOIL PIPE II DIAMETER (

DE	MKB21104
	97 – 108
NER nm)	99 – 105
	0.24
	60 x 110 x 34

PRODUCT CODE	MKBB2190
PAN SPIGOT OUTER DIAMETER (mm)	97 – 108
SOIL PIPE INNER DIAMETER (mm)	99 – 105
WEIGHT (KG)	0.31
DIMENSIONS (mm) A x B x C	60 x 110 x 65

PRODUCT CODE	МКВ114
PAN SPIGOT OUTER DIAMETER (mm)	97 – 108
SOIL PIPE INNER DIAMETER (mm)	99 – 105
WEIGHT (KG)	0.19
DIMENSIONS (mm) A x B x C	43 x 80 x 30

PRODUCT CODE	МКВ45
PAN SPIGOT OUTER DIAMETER (mm)	97 – 108
SOIL PIPE INNER DIAMETER (mm)	99 – 105
WEIGHT (KG)	0.19
DIMENSIONS (mm) A x B x C	43 x 100 x 60

Hong Kong distributor: Kembla	(HK) Limited	www.kembla.com.hk

REASONS TO TRUST MULTIKWIK

Space Saver Bend

Can be cut to suit both horizontally and vertically.

Cut if required.

Cut if required.

90° BEND - TALL

WC CONNECTORS / MODERN

90° BEND — VENT BOSS

90° SPACE SAVER BEND

RIGID 18MM OFFSET

MKRO2

RIGID 14° BEND

PIPE (1): Standard 99-105mm (2): Cast Iron 88-92mm (3): Old 74-77mm (4): Copper 105-108mm:

MKRB14





MKBB3190
















MKB3190


97 - 108

99 - 105


BBA 88/2107








Can be cut to suit both horizontally and vertically





Soil Pipe Extensions

Available for 4", 31/2" and 3" a Multikwik Soil Pipe Extension can be cut to required length, removing the unsightly existing pipe within the bathroom.



See page 78 for Pipe Extensions.

- Includes 40mm compression boss
- Must be used in a vertical position if boss is being used

)	PRODUCT CODE	MKBB3190
	PAN SPIGOT OUTER DIAMETER (mm)	97 – 108
	SOIL PIPE INNER DIAMETER (mm)	99 – 105
	WEIGHT (KG)	0.35
)	DIMENSIONS (mm) AxBxC	43 x 200 x 70

PRODUCT CODE	MKBAR90
PAN SPIGOT OUTER DIAMETER (mm)	97 – 108
SOIL PIPE INNER DIAMETER (mm)	99 – 105
WEIGHT (KG)	0.38
DIMENSIONS (mm) A x B x C	34 x 255 x 91

PRODUCT CODE	MKR02
PAN SPIGOT OUTER DIAMETER (mm)	97 – 108
SOIL PIPE INNER DIAMETER (mm)	99 – 105
WEIGHT (KG)	0.20
DIMENSIONS (mm) A x B x C	35 x 80 x 35

PRODUCT CODE	MKRB14
PAN SPIGOT OUTER DIAMETER (mm)	97 – 108
SOIL PIPE INNER DIAMETER (mm)	99 – 105
WEIGHT (KG)	0.20
DIMENSIONS (mm) AxBxC	40 x 105 x 40

TRUST MULTIKWIK

British Standards state that a solid ball of 80mm must pass through pipework unaided. All Multikwik WC connectors including those with boss upstands meet this requirement, reducing the chance of blockage and expensive remedial costs.

PAN SPIGOT OUTE DIAMETER (mm)

OIL PIPE INNER IAMETER (mm)



WC CONNECTORS / MODERN

PIPE (1): Standard 99-105mm (2): Cast Iron 88-92mm (3): Old 74-77mm (4): Copper 105-108mm:







REASONS TO TRUST MULTIKWIK

RIGID 90° BEND

MKRB90

RIGID STRAIGHT

MKRS2

RIGID 100MM OFFSET

MKO100

EXTENDED STRAIGHT

18MM OFFSET FOR 31/2" SOIL

MKS7

MK07




















= E	xtension	lenath:	15mm
- 1	VICIOIOII	ichigai.	Dillilli

PRODUCT CODE	MKRB90
PAN SPIGOT OUTER DIAMETER (mm)	97 – 108
SOIL PIPE INNER	99 – 105

0.33

37 x 210 x 50

Adjustable length: remove the fined seal and cut

with a fine tooth saw

DIAMETER (mr

PRODUCT CODE	MKRS2
PAN SPIGOT OUTER DIAMETER (mm)	97 – 108
SOIL PIPE INNER DIAMETER (mm)	99 – 105
WEIGHT (KG)	0.20
DIMENSIONS (mm) AxBxC	37 x 75 x 30

PRODUCT CODE	MK0100
PAN SPIGOT OUTER DIAMETER (mm)	97 – 108
SOIL PIPE INNER DIAMETER (mm)	99 – 105
WEIGHT (KG)	0.26
DIMENSIONS (mm) AxBxC	40 x 207 x 26

PRODUCT CODE	MKS7
PAN SPIGOT OUTER DIAMETER (mm)	97 – 108
SOIL PIPE INNER DIAMETER (mm)	88 – 92
WEIGHT (KG)	0.17
DIMENSIONS (mm) AxBxC	41 x 70 x 15

PRODUCT CODE	МК07
PAN SPIGOT OUTER DIAMETER (mm)	97 – 108
SOIL PIPE INNER DIAMETER (mm)	88 – 92
WEIGHT (KG)	0.15
DIMENSIONS (mm) A x B x C	34 x 77 x 30

SEALING FLANGES

When connecting a WC connector to the pan spigot, the sealing flanges must be pushed inside with the pipe.





Don't pull the other sealing flange out over the top of the pan spigot it may lead to leaks.





TRUST MULTIKWIK

Our Technical team can help you with any questions you may have - just give us a call on 01622 852 695 or send us an email to info@multikwik.com. You can even tweet your question to @multikwik.



WC CONNECTORS / MODERN

WC CONNECTORS / 0LD PIPE 1: Standard 99-105mm 2: Cast Iron 88-92mm 3: Old 74-77mm 4: Copper 105-108mm:







18MM OFFSET OLD BS1213 PANS TO OVERSIZE SOIL

14° BEND FOR OVERSIZE SOIL 90° BEND FOR OVERSIZE SOIL

STRAIGHT

STRAIGHT

18MM OFFSET

MK01S



MKB114S

MKB2190S

MKS1

MKS1A


MK01



































- Known as the No.1 the plumbers favourite
- This connector is for old style pans only for new pans use an MKS2 (see page 62)

PRODUCT CODE	MK01S
PAN SPIGOT OUTER DIAMETER (mm)	97 – 108
SOIL PIPE INNER DIAMETER (mm)	105 – 108
WEIGHT (KG)	0.18
DIMENSIONS (mm) A x B x C	45 x 76 x 20

PRODUCT CODE	MKB114S
PAN SPIGOT OUTER DIAMETER (mm)	97 – 108
SOIL PIPE INNER DIAMETER (mm)	105 – 108
WEIGHT (KG)	0.20
DIMENSIONS (mm) AxBxC	43 x 80 x 35

PRODUCT CODE	MKB2190S
PAN SPIGOT OUTER DIAMETER (mm)	97 – 108
SOIL PIPE INNER DIAMETER (mm)	105 – 108
WEIGHT (KG)	0.32
DIMENSIONS (mm) AxBxC	60 x 115 x 80

PRODUCT CODE	MKS1
PAN SPIGOT OUTER DIAMETER (mm)	108 – 114
SOIL PIPE INNER DIAMETER (mm)	99 – 105
WEIGHT (KG)	0.16
DIMENSIONS (mm) AxBxC	44 x 67 x 15

PRODUCT CODE	MKS1A
PAN SPIGOT OUTER DIAMETER (mm)	108 – 114
SOIL PIPE INNER DIAMETER (mm)	99 – 105
WEIGHT (KG)	0.17
DIMENSIONS (mm) A x B x C	40 x 70 x 15

PRODUCT CODE	MK01
PAN SPIGOT OUTER DIAMETER (mm)	108 – 114
SOIL PIPE INNER DIAMETER (mm)	99 – 105
WEIGHT (KG)	0.17
DIMENSIONS (mm) A x B x C	45 x 70 x 25



WC CONNECTORS / OLD

90° TIGHT KNUCKLE BEND OLD BS1213 PANS

MKB21

90° TIGHT KNUCKLE BEND OLD BS1213 PANS

MKB22



MKS3



MK03



MKS10



MKB21S

PIPE 1): Standard 99-105mm 2): Cast Iron 88-92mm 3): Old 74-77mm 4): Copper 105-108mm:
































PRODUCT CODE	MKB21
PAN SPIGOT OUTER DIAMETER (mm)	108 – 114
SOIL PIPE INNER DIAMETER (mm)	99 – 105
WEIGHT (KG)	0.24
DIMENSIONS (mm) A x B x C	45 x 80 x 80

PRODUCT CODE	МКВ22
PAN SPIGOT OUTER DIAMETER (mm)	108 – 114
SOIL PIPE INNER DIAMETER (mm)	99 – 105
WEIGHT (KG)	0.24
DIMENSIONS (mm) AxBxC	45 x 80 x 75

PRODUCT CODE	MKS3
PAN SPIGOT OUTER DIAMETER (mm)	108 – 114
SOIL PIPE INNER DIAMETER (mm)	88 – 92
WEIGHT (KG)	0.16
DIMENSIONS (mm) A x B x C	41 x 70 x 10

PRODUCT CODE	МК03
PAN SPIGOT OUTER DIAMETER (mm)	108 – 114
SOIL PIPE INNER DIAMETER (mm)	88 – 92
WEIGHT (KG)	0.15
DIMENSIONS (mm) A x B x C	37 x 78 x 30

PRODUCT CODE	MKS10
PAN SPIGOT OUTER DIAMETER (mm)	108 – 114
SOIL PIPE INNER DIAMETER (mm)	74 – 77
WEIGHT (KG)	0.16
DIMENSIONS (mm) AxBxC	35 x 86 x 12

PRODUCT CODE	MKB21S
PAN SPIGOT OUTER DIAMETER (mm)	108 – 114
SOIL PIPE INNER DIAMETER (mm)	105 – 108
WEIGHT (KG)	0.25
DIMENSIONS (mm) AxBxC	45 x 75 x 60

REASONS TO TRUST MULTIKWIK

Need an offset?

Measure from the centre line of your pipe to the centre line of your pan spigot.

Remember, offsets should not be installed in an upwards position. Water should be able to run horizontally or down.



WC CONNECTORS / STAINLESS STEEL

STRAIGHT EXTENDED STRAIGHT **UNDERSIZE SPIGOTS UNDERSIZE SPIGOTS**

18MM OFFSET UNDERSIZE SPIGOTS

UNDERSIZE SPIGOTS

14° BEND

14° BEND

MKB614

UNDERSIZE SPIGOTS TO 31/2" SOIL







MKS8



MK05





MKB514



PIPE (1): Standard 99-105mm (2): Cast Iron 88-92mm (3): Old 74-77mm (4): Copper 105-108mm:
























PRODUCT CODE	MKS5
PAN SPIGOT OUTER DIAMETER (mm)	76 - 95
SOIL PIPE INNER DIAMETER (mm)	99 – 105
WEIGHT (KG)	0.22
DIMENSIONS (mm) AxBxC	45 x 55 x 15

PRODUCT CODE	MKS8
PAN SPIGOT OUTER DIAMETER (mm)	76 – 95
SOIL PIPE INNER DIAMETER (mm)	99 – 105
WEIGHT (KG)	0.26
DIMENSIONS (mm) AxBxC	42 x 110 x 70

Extension length: 59mm

PRODUCT CODE	MK05
PAN SPIGOT OUTER DIAMETER (mm)	76 – 95
SOIL PIPE INNER DIAMETER (mm)	99 – 105
WEIGHT (KG)	0.24
DIMENSIONS (mm) AxBxC	45 x 72 x 22

PRODUCT CODE	MKB514
PAN SPIGOT OUTER DIAMETER (mm)	76 – 95
SOIL PIPE INNER DIAMETER (mm)	99 – 105
WEIGHT (KG)	0.26
DIMENSIONS (mm) A x B x C	42 x 85 x 40

PRODUCT CODE	МКВ614
PAN SPIGOT OUTER DIAMETER (mm)	76 – 95
SOIL PIPE INNER DIAMETER (mm)	88 – 92
WEIGHT (KG)	0.25
DIMENSIONS (mm) A x B x C	37 x 90 x 40

TRUST MULTIKWIK

All Multikwik WC connectors are supplied with a sachet of lubricant to ease the installation - with the exception of our adjustable and rigid connectors.





WC CONNECTORS / ANCILLARIES

MULTILINK

PIPE 1: Standard 99-105mm 2: Cast Iron 88-92mm 3: Old 74-77mm 4: Copper 105-108mm:

SOIL PIPE EXTENSION

SOIL PIPE EXTENSION FOR 3½" SOIL

SOIL PIPE EXTENSION

RIGID SOIL

MKREXT

FLUSH PIPE CONNECTOR

MKFPC1

MKL1







































Adjustable length: remove the fined seal and cut

with a fine tooth saw









PRODUCT CODE	MKEA
SOIL PIPE INNER DIAMETER (mm)	99 – 105
WEIGHT (KG)	0.24
DIMENSIONS (mm) AxB	50 x 202

PRODUCT CODE	МКЕВ
SOIL PIPE INNER DIAMETER (mm)	88 – 92
WEIGHT (KG)	0.22
DIMENSIONS (mm) A x B	50 x 202

= Can be cut to required length

Ideal when removing 3½" cast iron

МКЕВ	PRODUCT CODE	MKEG
88 – 92	SOIL PIPE INNER DIAMETER (mm)	74 – 77
0.22	WEIGHT (KG)	0.21
50 x 202	DIMENSIONS	42 x 210

Can be	cut to	required	length

	ldeal	when	removing	3"	cast	iron	
--	-------	------	----------	----	------	------	--

RODUCT CODE	MKEG
OIL PIPE INNER IAMETER (mm)	74 – 77
/EIGHT (KG)	0.21
IMENSIONS nm) AxB	42 x 210

	 Suitable for sleeving the fins of all 99 – 1 Multikwik outlets

PRODUCT CODE	MKREXT	
PAN SPIGOT OUTER DIAMETER (mm)	97 – 108	F
SOIL PIPE INNER DIAMETER (mm)	99 – 105	S
WEIGHT (KG)	0.23	٧
DIMENSIONS (mm) A x B	35 x 264	(

PRODUCT CODE	MKFPC1
SOIL PIPE INNER DIAMETER (mm)	-
WEIGHT (KG)	0.02
DIMENSIONS (mm) A x B	65 x 26

PRODUCT CODE	MKL1
SOIL PIPE INNER DIAMETER (mm)	99 – 105
WEIGHT (KG)	0.04
DIMENSIONS (mm) A	52.5

For connecting 2 or more pan connectors